
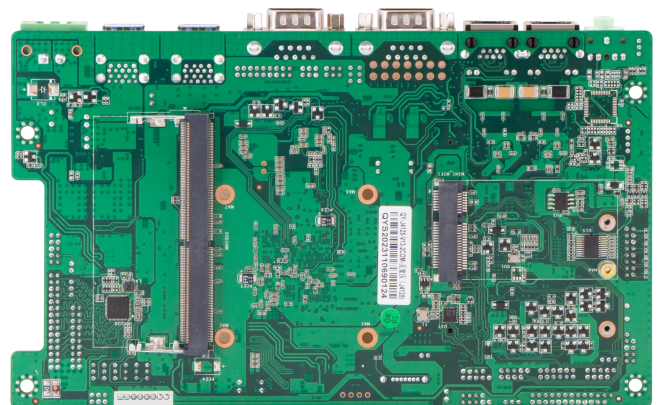


QY-MB-J4125-2C-002


- Intel Celeron J4125 CPU
- 2*COM, 4*USB3.0, 4*USB2.0, 2*Gigabit LAN
- 1*LVDS/eDP, 1*eDP, 1*HDMI, (Support triple display simultaneously)
- 2*Mini-PCIe (4G/Wifi/BT)
- 1*MSATA
- DC 12V Power Input

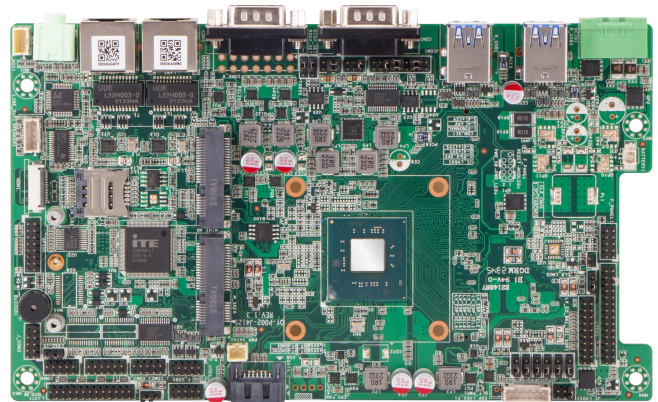


1. Specification

Model	QY-MB-J4125-2C-002
CPU	Intel Celeron J4125, up to 2.70G, Duad-core
Display	Support triple display simultaneously: 1 * HDMI: resolution up to 2560* 1440@60Hz 1 * LVDS/eDP: LVDS, resolution up to 1920 * 1080@60Hz 1 * eDP: resolution up to 1920 * 1200@60Hz
Memory	DDR4-2400, 1 * SO-DIMM, up to 8GB *Note: Due to the limitation of Windows 32-bit operating system, if more than 4 GB of memory is installed, it is actually. The memory capacity displayed on will be less than 4 GB.
Storage	1 * SATA3.0 7P Connector 1 * Mini-SATA
Expansion Interface	2 * Mini-PCIe (Wifi supported with 4G/BT selectable)
Ethernet	2 * Realtek 1Gbps PCIe Ethernet Controller, RJ45
Audio	Realtek HDA Codec, with MIC/Line-out and Amplifier 1 * MIC 1 * Line-Out 1 * SPK
COM	1 * RS232/RS485/RS422 Header 1 * RS232/RS485 Header
USB	4 * USB3.0 (Rear I/O, TYPE-A) 4 * USB2.0 (Internal, Header)
Other Ports	1 * LPT Header 1 * Micro SIM Card Slot 1 * CPU FAN Header 1 * Front Panel Header 1 * GPIO Header 1 * CMOS Clear Jumper
System	Windows 10/11, Linux
Temperature	Storage: -30~75°C Operating: -20° ~60°C
BIOS	AMI UEFI BIOS
Power Input	DC 9-36V
Factor	196mm * 115mm

2. Data Flow

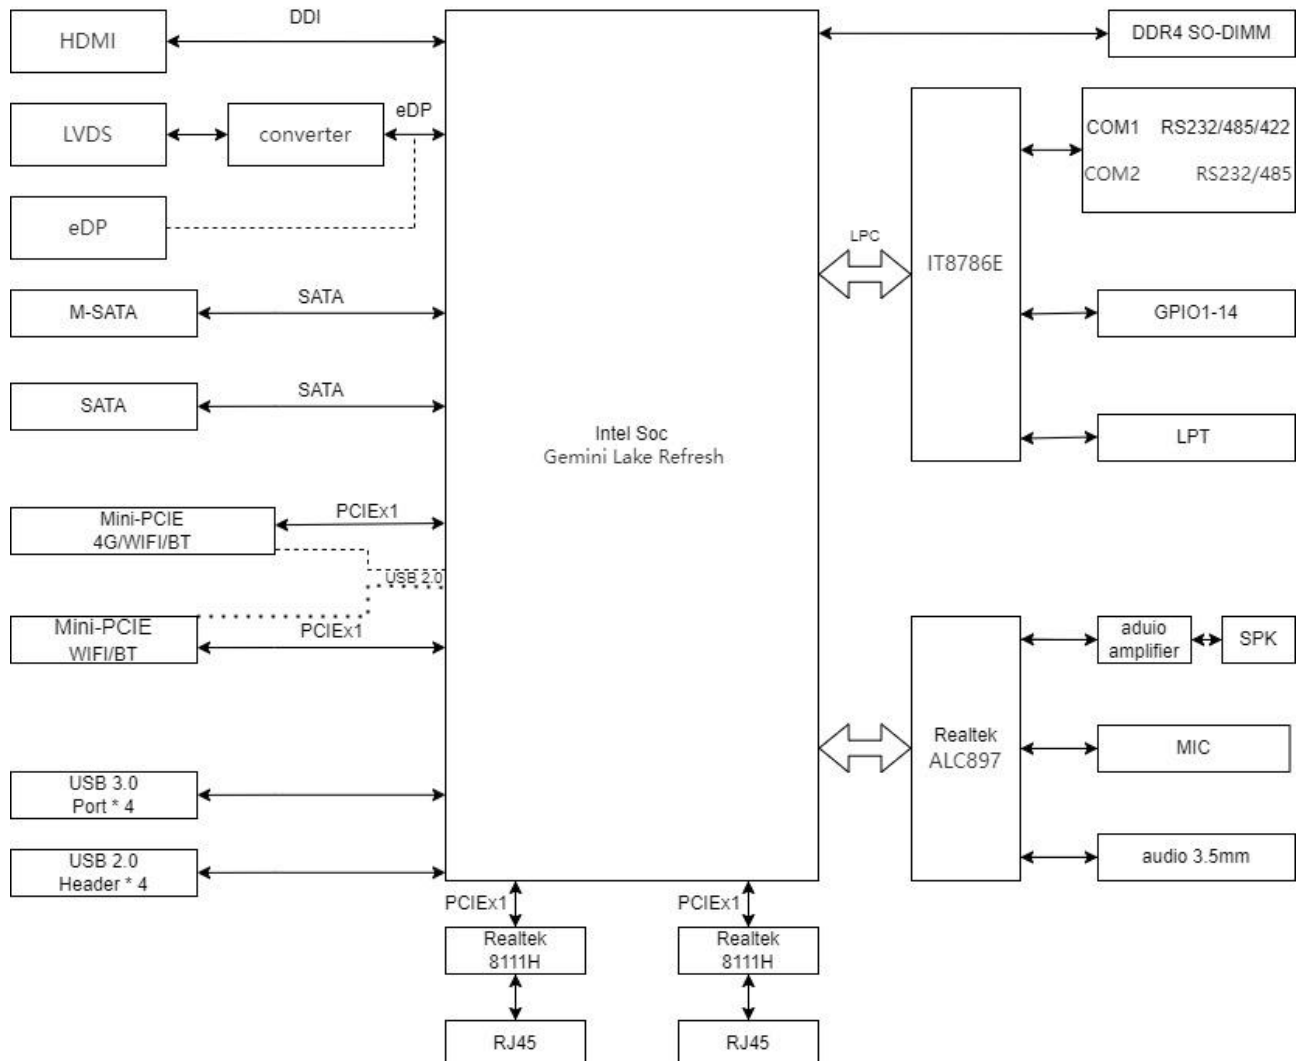

3. Marking instruction

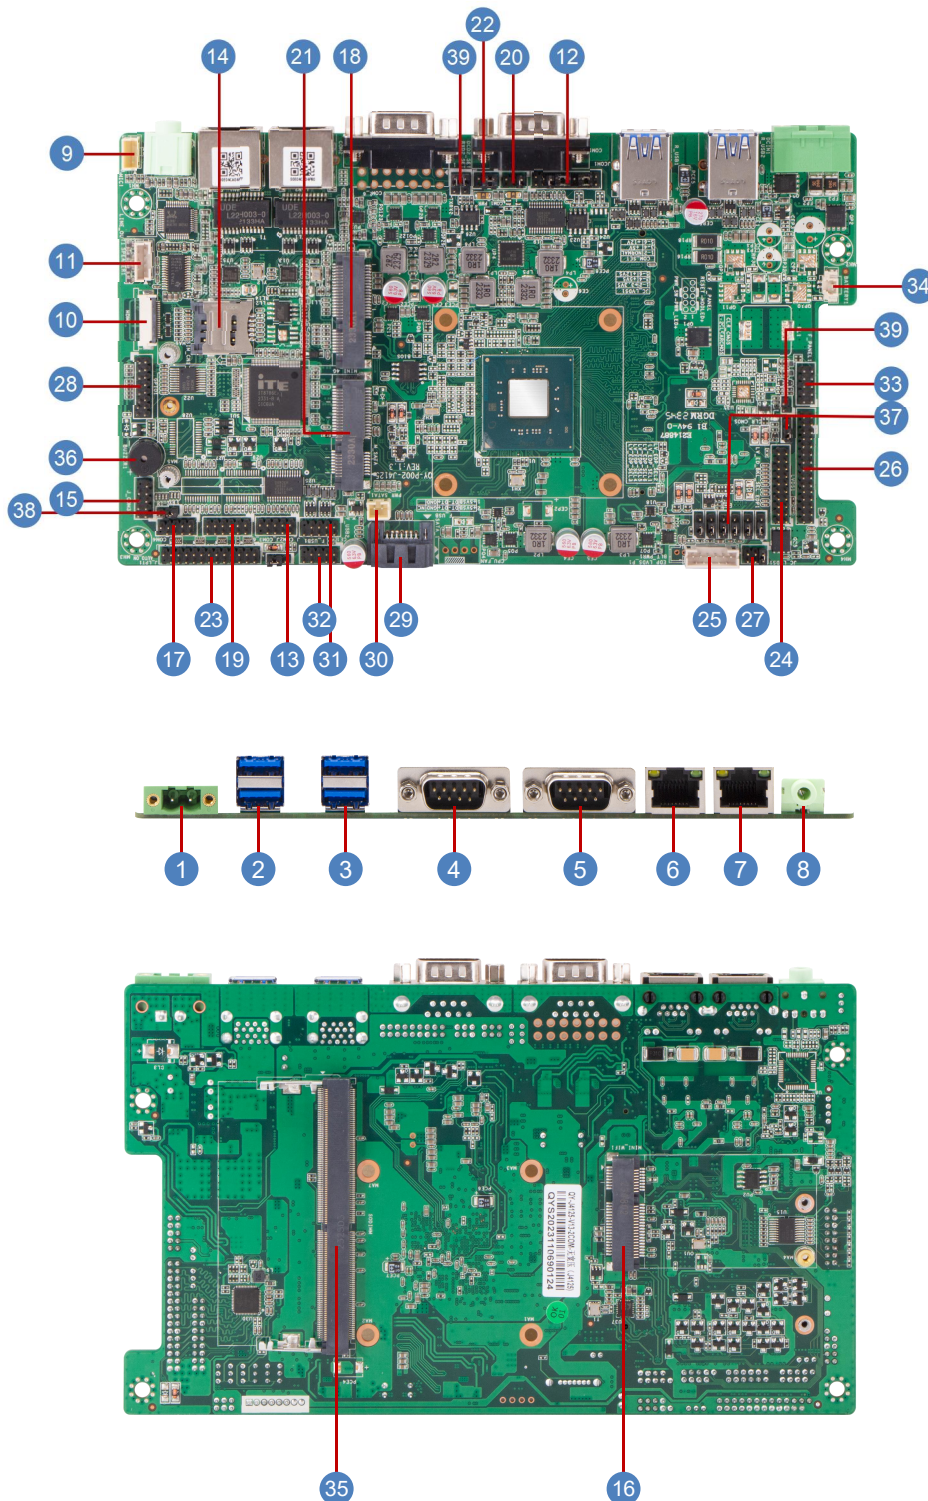

Connector&Header

1	DC12V Power Input Connector
2	USB3.0 Connectors
3	USB3.0 Connectors
4	COM1 Connectors
5	COM2 Connectors
6	LAN Connectors
7	LAN Connectors
8	Line-out Connector
9	MIC Pin Header
10	HDMI Pin Header
11	Amplifier Pin Header
12	COM1 Select Jumper
13	COM2 Pin Headers
14	SIM Card Slot
15	COM3 Pin Headers
16	Mini PCI-WIFI Slot (WIFI/BT)
17	COM4 Pin Headers
18	Mini PCI-4G_CAN Slot (WIFI/4G/BT)
19	COM3-6 Pin Headers
20	COM1 PWR Select Jumper
21	M-SATA Connector
22	COM2 Select Jumper
23	Parallel Port Pin Header
24	eDP Signal Pin Header
25	eDP/LVDS Backlight Control Pin Header
26	LVDS Signal Pin Header
27	eDP/LVDS VDD Select Jumper
28	GPIO Pin Header
29	SATA 3.0 Connector
30	SATA Power Pin Header
31	USB Pin Headers
32	USB Pin Headers
33	Front Panel Pin Header
34	CMOS battery Holder
35	DDR4 SO-DIMM Slot
36	Buzzer
37	eDP/LVDS Signal Select Jumpers
38	COM2 Mode RS232/485 jumper
39	COM2 RS232/485 jumper

4. Definition

[1] DC12V Power Input Header(1*2 5.0mm spacing)

Power input interface, supporting 9-36V.

[2] USB3.0 Connectors

Two USB3.0 Type-A™ interfaces are on the rear panel, supporting 5Gbps. And can be compatible with USB 2.0 specification. You can connect USB devices to this interface.

[3] USB3.0 Connectors

Two USB3.0 Type-A™ interfaces are on the rear panel, supporting 5Gbps. And can be compatible with USB 2.0 specification. You can connect USB devices to this interface.

[4] COM1 Connectors

No.	Location	Pin	Definition	Pin	Definition
4		1	DCD	2	RXD
		3	TXD	4	DTR
		5	GND	6	DSR
		7	RTS	8	CTS
		9	COM1-RI		

[5] COM1 Connectors

No.	Location	Pin	Definition	Pin	Definition
4		1	DCD	2	RXD
		3	TXD	4	DTR
		5	GND	6	DSR
		7	RTS	8	CTS
		9	COM1-RI		

[6] LAN Connectors

This network cable interface is an ultra-high-speed Ethernet, which provides connection to the Internet with the highest transmission rate per second. Up to 1 GB (1 Gbps)

[7] LAN Connectors

This network cable interface is an ultra-high-speed Ethernet, which provides connection to the Internet with the highest transmission rate per second. Up to 1 GB (1 Gbps).

[8] Line-out Connector(green)

This jack is an audio output hole and supports audio amplification function. It is recommended to connect headphones and speakers to this jack for better performance. Output audio (the actual effect may vary depending on the device you use)

[9] MIC Pin Header(1*3 Pin 2.0mm)

No.	Location	Pin	Definition	Pin	Definition
9	J-MIC1	1	MIC-L	2	GND
		3	MIC-R		

[10] HDMI Pin Header (1*20 Pin 1.0mm)


No.	Location	Pin	Definition	Pin	Definition
10	HDMI	1	N/C	2	TX2-DP
		3	TX2-DN	4	GND
		5	TX1-DP	6	TX1-DN
		7	GND	8	TX0-DP
		9	TX0-DN	10	GND
		11	CLK-DP	12	CLK-DN
		13	N/C	14	GND
		15	N/C	16	DDC-SCL
		17	DDC-SDA	18	HPD
		19	N/C	20	+V5S

[11] Amplifier Pin Header (1*4 Pin 2.00mm Wafer Header)

No.	Location	Pin	Definition	Pin	Definition
11	SPEAKER1	1	SPKR+	2	SPKR-
		3	SPKL-	4	SPKL+

[12] COM1 Select Jumper (2*9 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
12	JCOM1	1	COM1-IN	2	RX-485IN
		3	COM1-IN	4	RX-422IN
		5	COM1-IN	6	RX-232IN(Default)
		7	COM1-DCD	8	COM1-RX
		9	COM1-PIN1(Default)	10	COM1-PIN2(Default)
		11	COM1-422_T+/485-A	12	COM1-422-T-/485-B
		13	COM1-TX(Default)	14	COM1-DTR(Default)
		15	COM1-PIN3	16	COM1-PIN4
		17	COM1-422-R+	18	COM1-422-R-

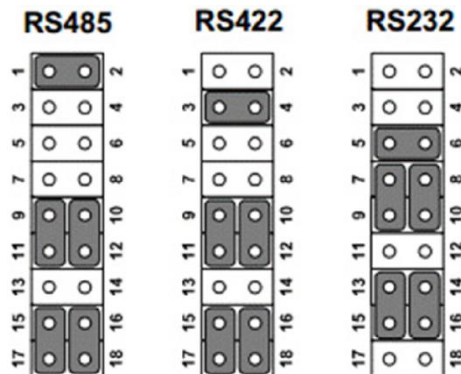

[13] COM2 Pin Headers (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
13	J-COM2	1	DCD	2	RXD
		3	TXD	4	DTR
		5	GND	6	DSR
		7	RTS	8	CTS
		9	RI		

[14] SIM Card Slot (Micro SIM)

[15] COM3 Pin Header (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
15	J-COM3	1	N/C	2	N/C
		3	N/C	4	N/C
		5	GND	6	N/C
		7	N/C	8	N/C
		9	N/C		

Note:

[1] 2 serial port version, chips and other components are not loaded, so the signal line is empty.

[16] Mini PCIe-WIFI Slot(WIFI/BT)

[17] COM4 Pin Header (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
17	J-COM4	1	N/C	2	N/C
		3	N/C	4	N/C
		5	GND	6	N/C
		7	N/C	8	N/C
		9	N/C		

Note:

[1] 2 serial port version, chips and other components are not loaded, so the signal line is empty.

[18] Mini PCIe-4G-CAN Slot (WIFI/4G/BT)

[19] COM3-6 Pin Headers (2*6 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
19	J-COM3-6	1	N/C	2	N/C
		3	N/C	4	N/C
		5	GND	6	GND
		7	N/C	8	N/C
		9	N/C	10	N/C

		11	GND	12	GND
--	--	----	-----	----	-----

Note:

[1] 2 serial port version, chips and other components are not loaded, so the signal line is empty.

[20] COM1 PWR Select Jumper (2*3 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
20	COM1 PWR	1	COM1-RI-PW(Default)-	2	RI
		3	COM1-RI-PW-	4	+ 5VS
		5	COM1-RI-PW-	6	+ 12VS

Note:

[1] Pin9 of COM1 also can be 0/5/12V(COM1 PWR Select Select Jumper)

[21] M-SATA Connector

[22] COM2 Select Jumper (2*3 Pin 2.0mm)

No.	Location	Pin	Definition	Pin	Definition
22	TXRX2	1	COM2-TX(Default)	2	COM2-RX(Default)
		3	COM2-TX/COM2-485-A	4	COM2-RX/COM2-485-B
		5	COM2-485-A	6	COM2-485-B

[23] Parallel Port Pin Header (2*13 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
23	J-LPT1	1	STB	2	AFD
		3	D0	4	ERR
		5	D1	6	INIT
		7	D2	8	SLINT
		9	D3	10	GND
		11	D4	12	GND
		13	D5	14	GND
		15	D6	16	GND
		17	D7	18	GND

		19	ACK	20	GND
		21	BUSY	22	GND
		23	PE	24	GND
		25	SLCT		

[24] eDP Signal Pin Header (2*10 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
24	eDP1	1	LCD-VDD	2	LCD-VDD
		3	GND	4	GND
		5	AUX-CH-N	6	AUX-CH-P
		7	GND	8	GND
		9	N/C	10	N/C
		11	N/C	12	N/C
		13	LANE1-N	14	LANE1-P
		15	LANE0-N	16	LANE0-P
		17	GND	18	GND
		19	N/C	20	HPD

Note:

[1] LV-EDP-SEL is the function switching jumper of EDP or LVDS. And only one of them can be used simultaneously. See [37]eDP/LVDS Signal.

[25] eDP/LVDS Backlight Control Pin wafer Header (1*6 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
25	BLT-PWR1	1	INVT-PWR	2	INVT-PWR
		3	BLK-EN	4	BLK-PWM
		5	GND	6	GND

[26] LVDS Signal Pin Header (2*15 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
26	LVDS1	1	LCD-VDD	2	LCD-VDD
		3	LCD-VDD	4	N/C
		5	GND	6	GND
		7	TA0N-	8	TA0P+
		9	TA1N-	10	TA1P+
		11	TA2N-	12	TA2P+
		13	GND	14	GND
		15	CLK-TAN-	16	CLK-TAP+
		17	TA3N-	18	TA3P+
		19	TB0N-	20	TB0P+
		21	TB1N-	22	TB1P+
		23	TB2N-	24	TB2P+
		25	GND	26	N/C
		27	CLK-TBN-	28	CLK-TBP+
		29	TB3N-	30	TB3P+

Note:

[1] LV-EDP-SEL is the function switching jumper of EDP or LVDS. And only one of them can be used simultaneously. See [37]eDP/LVDS Signal.

[27] eDP/LVDS VDD Select Jumper (2*3 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
27	JC-LVDS1	1	LCD-VDD(Default)	2	+V3.3S
		3	LCD-VDD	4	+V5S
		5	LCD-VDD	6	+V12S

[28] GPIO Pin Header (2*8 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
28	GPIO1	1	+5VS	2	GND
		3	IN-GP37 (A02.bit7)	4	OUT -GP46 (A03.bit6)
		5	IN-GP36 (A02.bit6)	6	OUT -GP40 (A03.bit0)
		7	IN-GP23 (A01.bit3)	8	OUT -GP10 (A00.bit0)
		9	IN-GP41 (A03.bit1)	10	OUT -GP47 (A03.bit7)
		11	IN-GP65 (A05.bit5)	12	OUT -GP50 (A04.bit0)
		13	IN-GP64 (A05.bit4)	14	OUT -GP33 (A02.bit3)
		15	IN-GP11 (A00.bit1)	16	OUT -GP67 (A05.bit7)

[29] SATA 3.0 Connector

[30] SATA Power Pin wafer Header (1*4 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
30	HHD-PWR1	1	GND	2	+ 5V

[31] USB Pin Headers (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
31	F-USB1	1	+5VS	2	+5VS
		3	Data0-	4	Data1 +
		5	Data0+	6	Data1 +
		7	GND	8	GND
				10	N/C

[32] USB Pin Headers (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
32	F-USB2	1	+5VS	2	+5VS
		3	Data0-	4	Data1 +
		5	Data0+	6	Data1 +
		7	GND	8	GND
				10	N/C

[33] Front Panel Pin Header (2*5 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
33	F-PANEL	1	HDD-LED+	2	PWR-LED+
		3	HDD-LED-	4	GND
		5	GND	6	PWE-SW
		7	RESET	8	GND
		9	+5VS	10	+VDC

[34] CMOS battery Holder

[35] DDR4 SO-DIMM Slot

[36] Buzzer

[37] eDP/LVDS Signal Select Jumpers (1*3 Pin 2.00mm*7 pairs)

Jump 1-2pin for LVDS signal output, and jump 2-3pin for eDP signal output. Default 1-2pin LVDS signal output.

[38] COM2 Mode RS232/485 jumper (1*3 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
38	RX2-IN	1	COM2-232 (Default)	2	COM2-RX
		3	COM2-485		

[39] COM2 RS232/485 jumper (2*3 Pin 2.00mm)

No.	Location	Pin	Definition	Pin	Definition
30	DCD2/RXD2-SET	1	COM2-DCD(Default)	2	COM2-RX(Default)
		3	COM2-PIN1	4	COM2-PIN2
		5	COM2-485--B	6	COM2-485+-A

[END]